

## UltraTEC™ UT Series Thermoelectric Cooler


**Note: This product is not recommended for new designs.**

The recommended replacement is:

MFG Part Number: 387004527

Description: UTX15-12-F2-4040-TA-RT-W6

The UT15-12-F2-4040-TA-RT-W6 is a high heat flux density thermoelectric cooler. The thermoelectric module is assembled with a large number of semiconducting thermoelectric couples to achieve a higher heat pumping capacity than standard single stage thermoelectric coolers. It has a maximum  $Q_c$  of 117.1 Watts when  $\Delta T = 0$  and a maximum  $\Delta T$  of 68.9 °C at  $Q_c = 0$ .

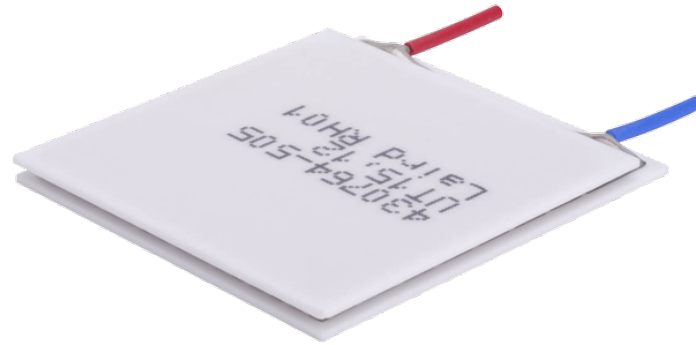


## Features

- High heat pump density
- Precise temperature control
- Reliable solid-state operation
- No sound or vibration
- DC operation
- RoHS-compliant

## Applications

- Thermoelectric Coolers and Assemblies for Medical Applications
- Thermoelectric Coolers for Handheld Cosmetic Lasers
- Industrial Laser Cooling
- Peltier Cooling for Digital Light Processors

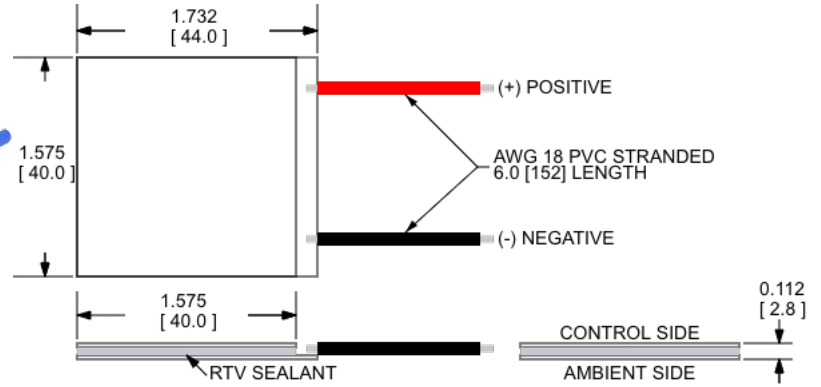

CERAMIC MATERIAL:  $Al_2O_3$

SOLDER CONSTRUCTION: 138°C, BiSn


INCHES [MM]

Note: Allow 0.020 in [0.5 mm] around perimeter of the thermoelectric cooler and lead wire attachment to accommodate sealant


## Electrical and Thermal Performance

For maximum performance, be sure to orient the CONTROL side of the TEC against the application to be managed and the AMBIENT side against the heat sink or other heat rejection method. The CONTROL side is always opposite the side with lead attachments. Lead attachment is a passive heat loss and less impactful if located on the side that attaches to the heat exchanger.


Heat Pumped at Cold Side  
 $T_{hot} = 27\text{ °C}$

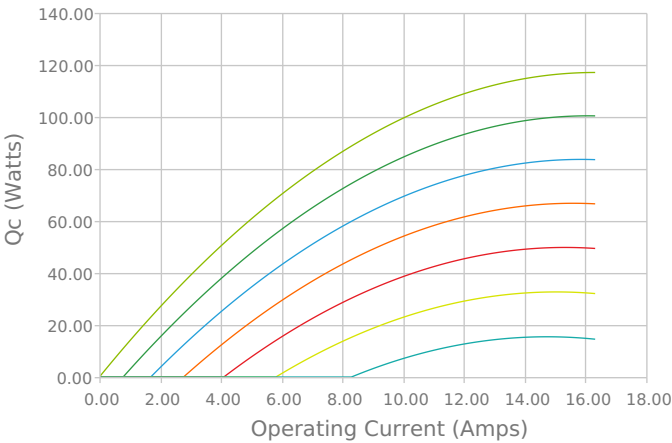


Heat Pumped at Cold Side  
 $T_{hot} = 27\text{ °C}$

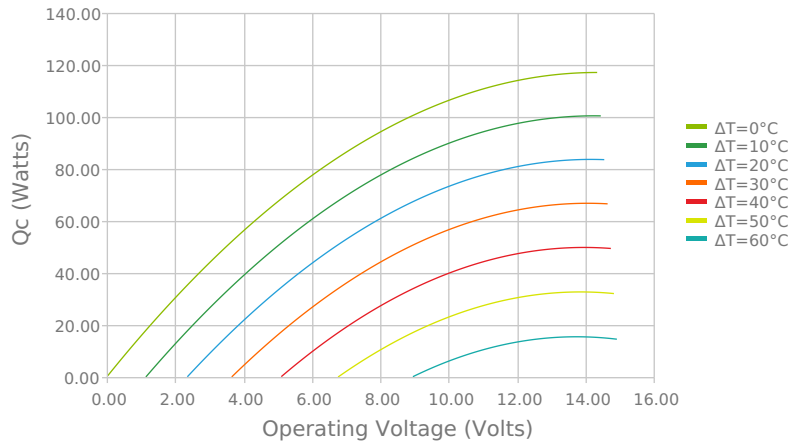


Current vs Voltage (I vs V)  
 $T_{hot} = 27\text{ °C}$

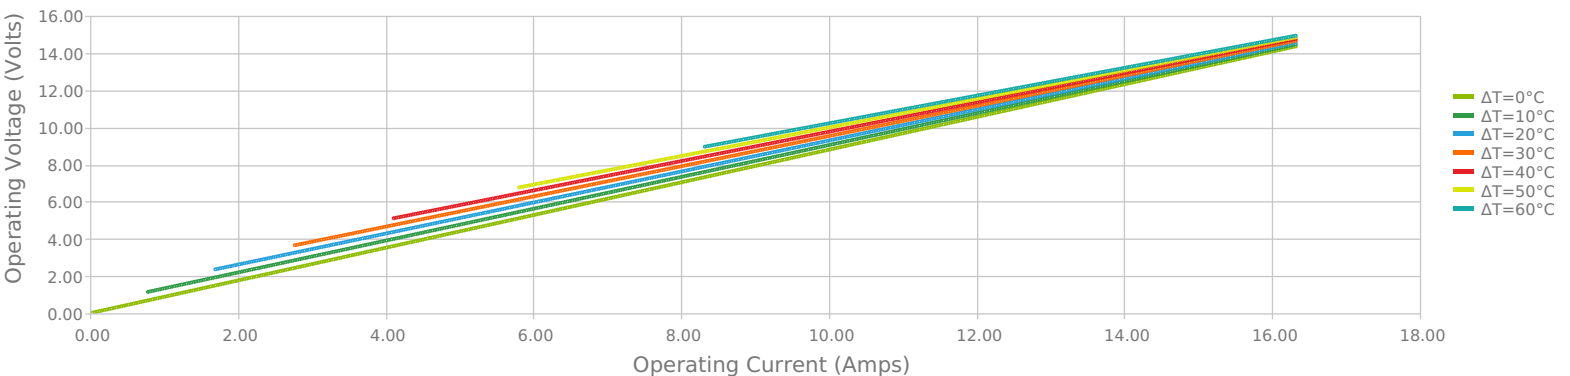


Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
 $T_{hot} = 27\text{ }^{\circ}\text{C}$

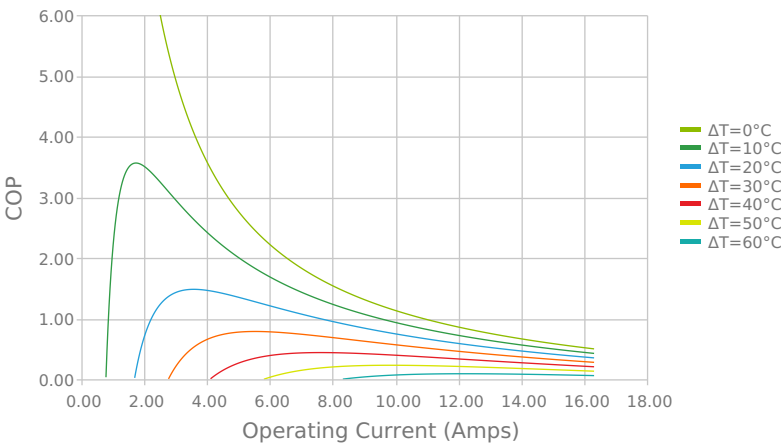


Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
 $T_{hot} = 27\text{ }^{\circ}\text{C}$

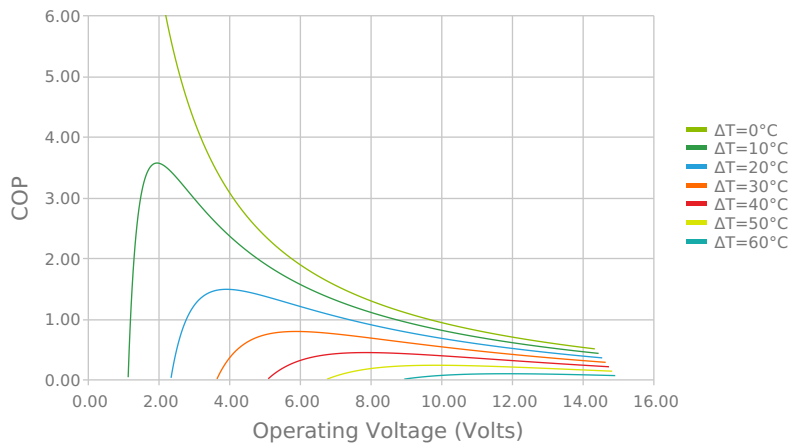


Total Heat Dissipated at Hot Side ( $Q_h=Q_c+P_{in}$ )  
 $T_{hot} = 27\text{ }^{\circ}\text{C}$

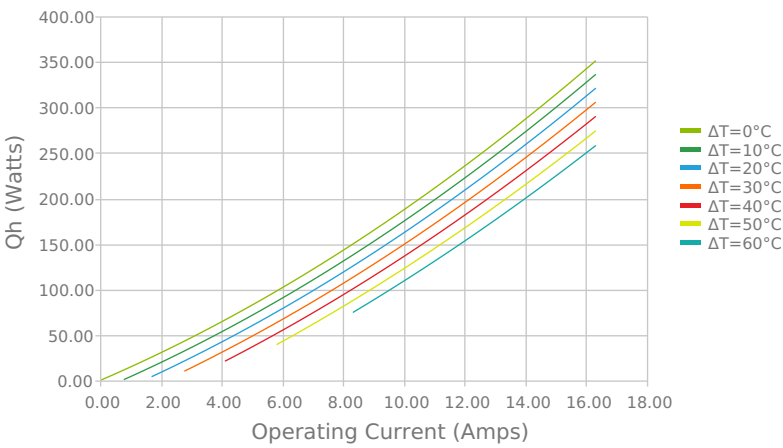


Total Heat Dissipated at Hot Side ( $Q_h=Q_c+P_{in}$ )  
 $T_{hot} = 27\text{ }^{\circ}\text{C}$

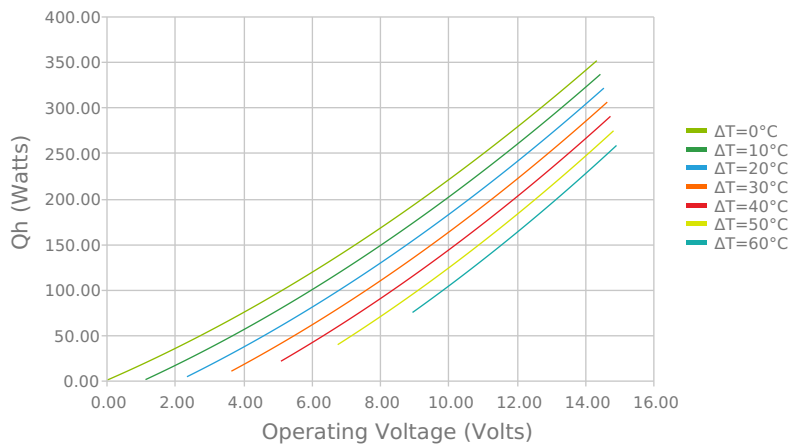

Heat Pumped at Cold Side ( $Q_c$ )  
 $T_{hot} = 35\text{ }^{\circ}\text{C}$  |  $i_{operating} = 12.3\text{ Amps}$

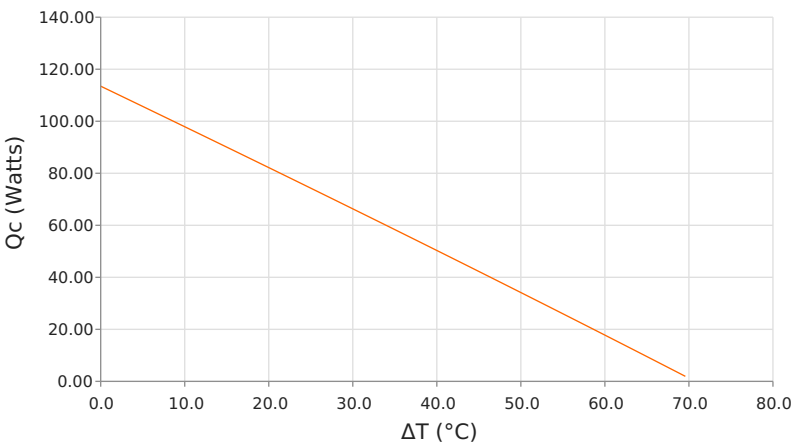

Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
 $T_{hot} = 35\text{ }^{\circ}\text{C}$  |  $i_{operating} = 12.3\text{ Amps}$

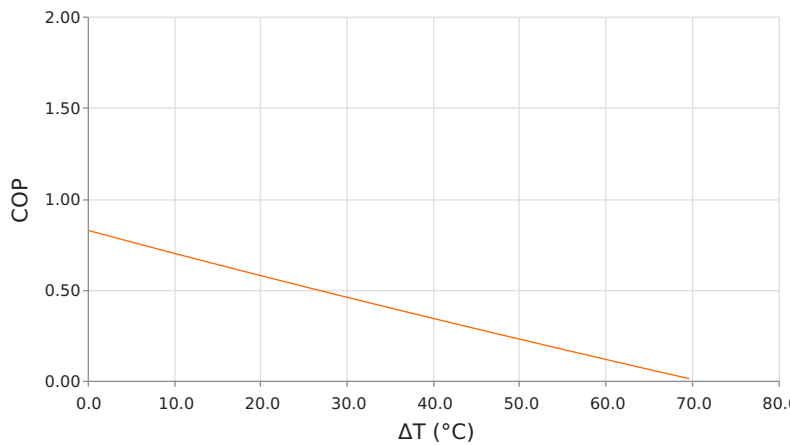

Specifications

| Hot Side Temperature      | 27.0 °C      | 35.0 °C     | 50.0 °C     |
|---------------------------|--------------|-------------|-------------|
| Qcmax (ΔT = 0)            | 117.1 Watts  | 120.7 Watts | 126.9 Watts |
| ΔTmax (Qc = 0)            | 68.9°C       | 71.8°C      | 77.0°C      |
| Imax (I @ ΔTmax)          | 14.4 Amps    | 14.4 Amps   | 14.2 Amps   |
| Vmax (V @ ΔTmax)          | 13.6 Volts   | 14.2 Volts  | 15.1 Volts  |
| Module Resistance         | 0.88 Ohms    | 0.92 Ohms   | 0.98 Ohms   |
| Max Operating Temperature | 80 °C        |             |             |
| Weight                    | 20.0 gram(s) |             |             |

Finishing Options

| Suffix | Thickness                            | Flatness / Parallelism                     | Hot Face | Cold Face | Lead Length         |
|--------|--------------------------------------|--------------------------------------------|----------|-----------|---------------------|
| TA     | 2.845 ±0.025 mm<br>0.112 ± 0.0010 in | 0.025 mm / 0.025 mm<br>0.001 in / 0.001 in | Lapped   | Lapped    | 152.4 mm<br>6.00 in |

Sealing Options

| Suffix | Sealant | Color                | Temp Range   | Description                      |
|--------|---------|----------------------|--------------|----------------------------------|
| RT     | RTV     | Translucent or White | -60 to 204°C | Non-corrosive, silicone adhesive |

Notes

Max operating temperature: 80°C  
Do not exceed Imax or Vmax when operating module  
Reference assembly guidelines for recommended installation

Any information furnished by Tark Thermal Solutions and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Tark Thermal Solutions. All specifications are subject to change without notice. Tark Thermal Solutions assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Tark products are sold subject to the Tark Thermal Solutions Terms and Conditions of sale (including Tark’s limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2025 Tark Thermal Solutions, Inc. All rights reserved.

UltraTEC™ is a trademark of Tark Thermal Solutions, Inc. All other marks are owned by their respective owners.

Revision: 00 Date: 06-01-2022

Print Date: 05-29-2025